PLAIN FLAP

NACA

RESEARCH MEMORANDUM

TWO-DIMENSIONAL WIND-TUNNEL INVESTIGATION AT HIGH

REYNOLDS NUMBERS OF AN NACA 65A006

AIRFOIL WITH HIGH-LIFT DEVICES

By

Robert J. Nuber and Stanley M. Gottlieb

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS

WASHINGTON
February 4, 1948

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

TWO-DIMENSIONAL WIND-TUNNEL INVESTIGATION AT HIGH

REYNOLDS NUMBERS OF AN NACA 65A006

AIRFOIL WITH HIGH-LIFT DEVICES

By Robert J. Nuber and Stanley M. Gottlieb

SUMMARY

An investigation was made of an NACA 65A006 airfoil equipped with high-lift devices consisting of a 0.15-chord drooped-nose flap and a 0.20-chord plain trailing-edge flap. The airfoil section lift, pitching-moment, and drag characteristics obtained at high Reynolds numbers and low Mach numbers $(M \lesssim 0.14)$ with the flaps deflected individually and simultaneously are presented.

The results indicated that at Reynolds numbers up to 9.0×10^6 the optimum combination of drooped-nose and plain trailing-edge flaps tested increased the maximum section lift coefficient from 0.78 to 1.89. The optimum combination of flap deflections obtained was 28° for the drooped-nose and 59° for the plain trailing-edge flap. The maximum section lift coefficient remained substantially constant between Reynolds numbers of 3.0×10^6 and 9.0×10^6 for the plain airfoil and the optimum combination of flap deflections tested but increased by approximately 0.08 as the Reynolds number was increased to 18.0×10^6.

Deflecting the drooped-nose flap was more effective than deflecting the plain trailing-edge flap in increasing the lift coefficient at which the drag increased rapidly. The section lift characteristics of both the NACA 65A006 and circular-arc airfoils are in good agreement. The main difference between these airfoils is that the drag of the NACA 65A006 airfoil is comparatively low up to much higher lift coefficients than is the case for the circular-arc airfoil.

INTRODUCTION

The use of thin airfoils on aircraft designed for the transonic and supersonic speed ranges has emphasized the need for the development

of means to increase the naturally low maximum lift of these profiles
in order to obtain satisfactory low-speed characteristics.

The results of an investigation to determine the low-speed
characteristics of two symmetrical circular-arc airfoils, 6 and
10 percent thick, equipped with leading-edge and trailing-edge flaps,
are presented in reference 1. Recent data indicate that thin
NACA 6-series airfoils have lower drag in the transonic speed range
than circular-arc airfoils. The present investigation was therefore
made to furnish the lift, drag, and pitching-moment characteristics of
an NACA 65A006 airfoil with the 0.20-chord plain trailing-edge flap
and the 0.15-chord drooped-nose flap deflected individually and in
appropriate combinations for comparison with the circular-arc airfoil
sections. These tests were made in the Langley two-dimensional low-
turbulence tunnel, a variable-density wind tunnel which enables both
the Reynolds number and Mach number appropriate to the landing condition
for a typical airplane to be approximated simultaneously.

COEFFICIENTS AND SYMBOLS

c_l section lift coefficient $\left(\dfrac{l}{q_0 c}\right)$

c_d section drag coefficient $\left(\dfrac{d}{q_0 c}\right)$

$c_{m_c/4}$ section pitching-moment coefficient about the quarter

chord $\left(\dfrac{m_c/4}{q_0 c^2}\right)$

$c_{m_{a.c.}}$ section pitching-moment coefficient about the aerodynamic

center $\left(\dfrac{m_{a.c.}}{q_0 c^2}\right)$

where

l lift per unit span

d drag per unit span

m pitching moment per unit span

c chord of airfoil with flaps neutral

q_0 free-stream dynamic pressure $\left(\dfrac{\rho_0 V_0^2}{2}\right)$

ρ_0 free-stream mass density

V_o free-stream velocity

and

α_o section angle of attack, degrees

δ flap deflection, degrees, positive when deflected below
              chord line

R Reynolds number

$\Delta\alpha_{c_{l_{max}}}$ increment of section angle of attack at maximum lift due
              to flap deflection

$\Delta c_{l_{max}}$ increment of maximum section lift coefficient due to flap
              deflection

Subscripts:

N drooped-nose flap

F plain trailing-edge flap

MODEL

The model used in this investigation was a 24-inch chord
NACA 65A006 airfoil equipped with a 15-percent chord drooped-nose
flap and a 20-percent chord plain trailing-edge flap. Ordinates and
photographs of the model are presented in table I and figures 1 and 2,
respectively. Both flaps were pivoted on leaf hinges mounted flush
with the lower surface. Model end plates, as shown in figure 1(a),
were used to facilitate setting the deflection of the flaps. The model
was designed so that plain trailing-edge flap deflections δ_F up
to 59° and drooped-nose flap deflections δ_N up to 47° could be
obtained. The flaps were sealed at the hinge line by having the
flap skirt in rubbing contact with the flap.

The model surfaces were finished with number 400 carborundum
paper; slight discontinuities, however, existed at the leaf hinges on
the lower surface and at the line of contact between the flaps and flap
skirts.

TESTS

The tests were made in the Langley two-dimensional low-turbulence
pressure tunnel. The tests included measurements of lift and pitching

moment at a Reynolds number of 6.0×10^6 with the high-lift devices
deflected either individually or in conjunction with one another. In
addition, the lift characteristics were obtained at Reynolds numbers
of 3.0, 9.0, 14.0, and 18.0×10^6 with the flaps neutral and with the
drooped-nose and plain trailing-edge flaps deflected simultaneously
to 28° and 59°, respectively.

Drag measurements for the flaps neutral condition were obtained
at Reynolds numbers of 3.0, 6.0, and 9.0×10^6. A further investigation
of the drag characteristics was conducted at a Reynolds number of
6.0×10^6 with the drooped-nose and plain trailing-edge flaps deflected
as low-drag control flaps. For these tests, the high-lift devices were
deflected both individually or in appropriate combinations through a
range of deflections from 0° to 20°.

At Reynolds numbers of 3.0, 6.0, and 9.0×10^6 the Mach
number was substantially constant at 0.10. At Reynolds numbers of
14.0×10^6 and 18.0×10^6 the Mach numbers were 0.12 and 0.14,
respectively. The airfoil lift, drag, and pitching-moment data were
obtained and corrected to free air conditions by the methods described
in reference 2.

RESULTS AND DISCUSSION

Plain airfoil.- The section aerodynamic characteristics of the
NACA 65A006 airfoil with the flaps neutral are presented in figures 3
and 4.

The maximum section lift coefficients remain approximately
constant at 0.78 for Reynolds numbers of 3.0, 6.0, and 9.0×10^6
whereas a favorable scale effect exists for Reynolds numbers above
9.0×10^6 which increases the maximum section lift coefficient to a
value of 0.85 at a Reynolds number of 18.0×10^6. At Reynolds numbers
of 3.0, 6.0, and 9.0×10^6, it is believed that the small leading-
edge radius of the NACA 65A006 airfoil causes separation much in
the manner as occurs with a sharp leading edge. As the Reynolds
number is increased, the round nose becomes effective and the same
type of scale effect on the maximum section lift coefficient is observed
on this airfoil as is observed on airfoils with larger leading-edge
radius at lower Reynolds numbers. The jogs in the lift curve which
originate at angles of attack of $\pm 5^\circ$, corresponding to a Reynolds number
of 6.0×10^6, tend to move to higher angles of attack as the Reynolds
number is increased. These jogs in the lift curves may be the result
of the formation of a small local region of separated flow near the
leading edge as discussed in reference 3.

The slope of the lift curves remains approximately constant at 0.106 as the Reynolds number is increased from 3.0×10^6 to 18.0×10^6. At a Reynolds number of 3.0×10^6 a slight discontinuity in the lift curve occurs near zero lift.

The quarter-chord pitching-moment data indicate that the aero-dynamic center is located at the quarter-chord point of the airfoil. As is usually the case when an airfoil stalls, the center of pressure of the NACA 65A006 airfoil moves toward the rear and the quarter-chord moment coefficient increases negatively.

The minimum section drag coefficient remains approximately constant with increasing Reynolds number. At moderate lift coefficients, the variation in drag coefficient with Reynolds number is typical of that obtained on most NACA 6-series airfoils; however, at lift coefficients between 0.5 and 0.6 the drag rise is very rapid. The fact that the minimum drag of the NACA 65-006 airfoil, given in reference 4, is lower than that of the present model may be attributed to surface irregularities caused by the flap installation. These surface irregularities also cause the dissymmetry of the drag polars.

Airfoil with flaps deflected individually.- The lift and pitching-moment characteristics of the NACA 65A006 airfoil for various deflections of the drooped-nose and plain trailing-edge flaps deflected individually are presented in figures 5 and 6. The variation of the increment in maximum section lift coefficient $\Delta c_{l_{max}}$ and increment of section angle of attack at maximum lift $\Delta \alpha_{c_{l_{max}}}$ with deflection of the drooped-nose flap and the plain trailing-edge flap is summarized in figure 7.

As the 0.20-chord plain trailing-edge flap was deflected (fig. 5), the maximum section lift coefficients increased while the angles of attack for maximum lift decreased. The maximum section lift coefficient obtained was 1.62 which appears to be very nearly the optimum. For plain trailing-edge flap deflections up to 20^o, the flow over the flap appears to be unseparated at low angles of attack and the increment in lift coefficient due to flap deflection is large. As angles of attack near maximum lift are reached, it is believed that the flow over the flap becomes separated as indicated by the decrease in flap effectiveness. Deflecting the plain trailing-edge flap from 20^o to 29^o and above caused the flow over the flap to become separated over the entire range of angles of attack as indicated by the decrease in flap effectiveness (fig. 5). Increasing the plain trailing-edge flap deflections above 29^o produced increments in the section lift coefficient of the magnitude expected for separated flow. The jogs, shown on the curves for plain trailing-edge flap deflections of 49^o and 59^o, have been observed on

other airfoils with plain flaps. The sudden increases in the slope of
the lift curves, particularly for flap deflections of 29° and above for
angles of attack near maximum lift, are similar to those observed for
6-percent-thick airfoils with split flaps (reference 4).

Deflecting the drooped-nose flap (fig. 6) increased the maximum
section lift coefficients and increased the angles of attack for maximum
lift by alleviating the negative pressure peaks that cause leading-edge
separation near maximum lift. These pressure peaks are alleviated
because the flow approaching the leading edge is more nearly alined at
high angles of attack when the drooped-nose flap is deflected. With
the drooped-nose flap deflected 47° the maximum section lift coefficient
corresponding to a Reynolds number of 6.0×10^6 is 1.19. Figure 7 shows
that the maximum section lift coefficient is substantially the same for
drooped-nose flap deflections above 28°. At angles of attack well
below those for maximum lift (fig. 6), the drooped-nose flap acts as
a spoiler on the lower surface of the airfoil which causes some reduction
in lift. These losses in lift increase as the drooped-nose flap deflection
is increased.

The pitching-moment characteristics presented in figures 5 and 6
with either the drooped-nose flap or the plain trailing-edge flap
deflected indicate that the aerodynamic center tends to move toward
the leading edge for angles of attack less than but approaching the
angle of attack for maximum lift. The unusual variation of the pitching-
moment curves with flap deflection for plain trailing edge flap
deflections of 20° and 29° (fig. 5) is associated with the separation
which caused a similar phenomenon in the lift characteristics.

Airfoil with flaps deflected in combination.- The results of the
investigation in which the drooped-nose and plain trailing-edge flaps
were deflected simultaneously in various combinations are presented
in figure 8. It can be seen by reference to figure 8 that the optimum
flap configuration tested, corresponding to the highest maximum section
lift coefficient, was $\delta_N = 28^\circ$, $\delta_F = 59^\circ$. In view of this result,
a series of tests were made to determine the scale effect on maximum
lift with the drooped-nose and plain trailing-edge flaps deflected 28°
and 59°, respectively. These data, presented in figure 9, show that
the maximum section lift coefficient for Reynolds numbers of 3.0, 6.0,
and 9.0×10^6 remains approximately constant at a value of 1.89. The
maximum section lift coefficient, however, increases with increasing
Reynolds number between Reynolds numbers of 9.0×10^6 and 18.0×10^6
by approximately 0.08. This phenomenon is similar to that for the
flaps neutral condition.

With the plain trailing-edge flap deflected 59°, the increment in
the maximum section lift coefficient and the angle of attack for
maximum lift obtained by deflecting the drooped-nose flap from 0°
(fig. 5) to 28° (fig. 8) is 0.27 and 5°, respectively. This increment

in maximum section lift coefficient is about 67 percent of that obtained by deflecting the drooped-nose flap from 0° to 28° (fig. 6) when the plain trailing-edge flap is in the neutral position.

The section pitching-moment characteristics of the airfoil at combined flap deflections of $\delta_N = 28^\circ$, $\delta_F = 59^\circ$ (fig. 8) show that the aerodynamic center remains ahead of the quarter-chord point in the angle-of-attack range from about -3° to 11°. In addition, the combined action of the drooped-nose flap and plain trailing-edge flap caused stable pitching-moment characteristics at angles of attack less than -3° and greater than 11°.

Effect of small flap deflections on drag.- The lift and drag characteristics of the NACA 65A006 airfoil with the drooped-nose and plain trailing-edge flaps deflected individually and in various combinations are presented in figure 10. Deflecting the drooped-nose flap 5°, 9°, and 19° caused no appreciable change in the section drag coefficient of the airfoil at a lift coefficient of 0.30, but progressive increases in the lift coefficient at which the drag increased rapidly were obtained. This result is attributed to the drooped-nose flap delaying the formation of a negative pressure peak at the leading edge as it is deflected. In general, deflecting the drooped-nose flap was more effective than was deflecting the plain trailing-edge flap in increasing the lift coefficient at which the drag increased rapidly.

The lift and pitching-moment characteristics of the airfoil for two combined deflections of the drooped-nose and plain trailing-edge flaps which showed the greatest increase in the lift coefficient at which the drag increased rapidly are presented in figure 11.

Comparison with circular-arc airfoil.- Some of the results of the present investigation are compared in figure 12 with those obtained from tests of the 6-percent-thick circular-arc airfoil (reference 1), designated NACA 2S-(50)(03)-(50)(03). These data indicate that the section lift characteristics of both airfoils are in good agreement. The pitching-moment characteristics show that the aerodynamic center of the circular-arc airfoil is nearer the leading edge than that of the NACA 6-series airfoil. The major differences between the two airfoils occur in the drag characteristics (not compared herein) where the magnitude of the drag of the NACA 6-series airfoil is comparatively low up to much higher lift coefficients than is the case for the circular-arc airfoil.

It is believed that the air loads on the drooped-nose flap of the NACA 65A006 airfoil may be greater than those on the drooped-nose flap of the NACA 2S-(50)(03)-(50)(03) airfoil (reference 5) at the high Reynolds numbers only because the magnitude of the peak pressures near the leading edge of the NACA 6-series airfoil probably will not be limited by separation.

CONCLUSIONS

The results of a two-dimensional wind-tunnel investigation at Reynolds numbers from 3.0×10^6 to 18.0×10^6 of an NACA 65A006 airfoil equipped with a leading-edge flap and a trailing-edge flap indicate the following conclusions:

1. At Reynolds numbers up to 9.0×10^6, the optimum combination of drooped-nose and plain trailing-edge flaps tested increased the maximum section lift coefficients from 0.78 to 1.89.

2. The optimum combination of flap deflections obtained was 28° for the drooped-nose flap and 59° for the plain trailing-edge flap.

3. The maximum section lift coefficient remained substantially constant between Reynolds numbers of 3.0×10^6 and 9.0×10^6 for the plain airfoil and the optimum combination of flap deflections tested but increased by approximately 0.08 as the Reynolds number was increased to 18.0×10^6.

4. Deflection of the drooped-nose flap was more effective than was deflection of the plain trailing-edge flap in increasing the lift coefficient at which the drag increased rapidly.

5. The section lift characteristics of both the NACA 65A006 and circular-arc airfoils are in good agreement. The main difference between these airfoils is that the drag of the NACA 65A006 airfoil is comparatively low up to much higher lift coefficients than is the case for the circular-arc airfoil.

Langley Memorial Aeronautical Laboratory
        National Advisory Committee for Aeronautics
                Langley Field, Va.

REFERENCES

1. Underwood, William J., and Nuber, Robert J.: Two-Dimensional Wind-
      Tunnel Investigation at High Reynolds Numbers of Two Symmetrical
      Circular-Arc Airfoil Sections with High-Lift Devices. NACA
      RM No. L6K22, 1947.

2. von Doenhoff, Albert E., and Abbott, Frank T., Jr.: The Langley
      Two-Dimensional Low-Turbulence Pressure Tunnel. NACA TN No. 1283,
      1947.

3. von Doenhoff, Albert E , and Tetervin, Neal: Investigation of the
      Variation of Lift Coefficient with Reynolds Number at a Moderate
      Angle of Attack on a Low-Drag Airfoil. NACA CB, Nov. 1942.

4. Abbott, Ira H., von Doenhoff, Albert E., and Stivers, Louis S., Jr.:
      Summary of Airfoil Data. NACA ACR No. L5C05, 1945.

5. Underwood, William J., and Nuber, Robert J.: Aerodynamic Load
      Measurements over Leading-Edge and Trailing-Edge Plain Flaps on
      a 6-Percent-Thick Symmetrical Circular-Arc Airfoil Section.
      NACA RM No. L7H04, 1947.

TABLE I

ORDINATES FOR THE NACA 65A006 AIRFOIL

[Stations and ordinates given in percent of airfoil chord]

Station	Upper surface	Lower surface
0	0	0
.5	.464	-.464
.75	.563	-.563
1.25	.718	-.718
2.5	.981	-.981
5	1.313	-1.313
7.5	1.591	-1.591
10	1.824	-1.824
15	2.194	-2.194
20	2.474	-2.474
25	2.687	-2.687
30	2.842	-2.842
35	2.945	-2.945
40	2.996	-2.996
45	2.992	-2.992
50	2.925	-2.925
55	2.793	-2.793
60	2.602	-2.602
65	2.364	-2.364
70	2.087	-2.087
75	1.775	-1.775
80	1.437	-1.437
85	1.083	-1.083
90	.727	-.727
95	.370	-.370
100	0	0

L. E. Radius: 0.229
T. E. Radius: 0.014

NACA

NACA LMAL 53495
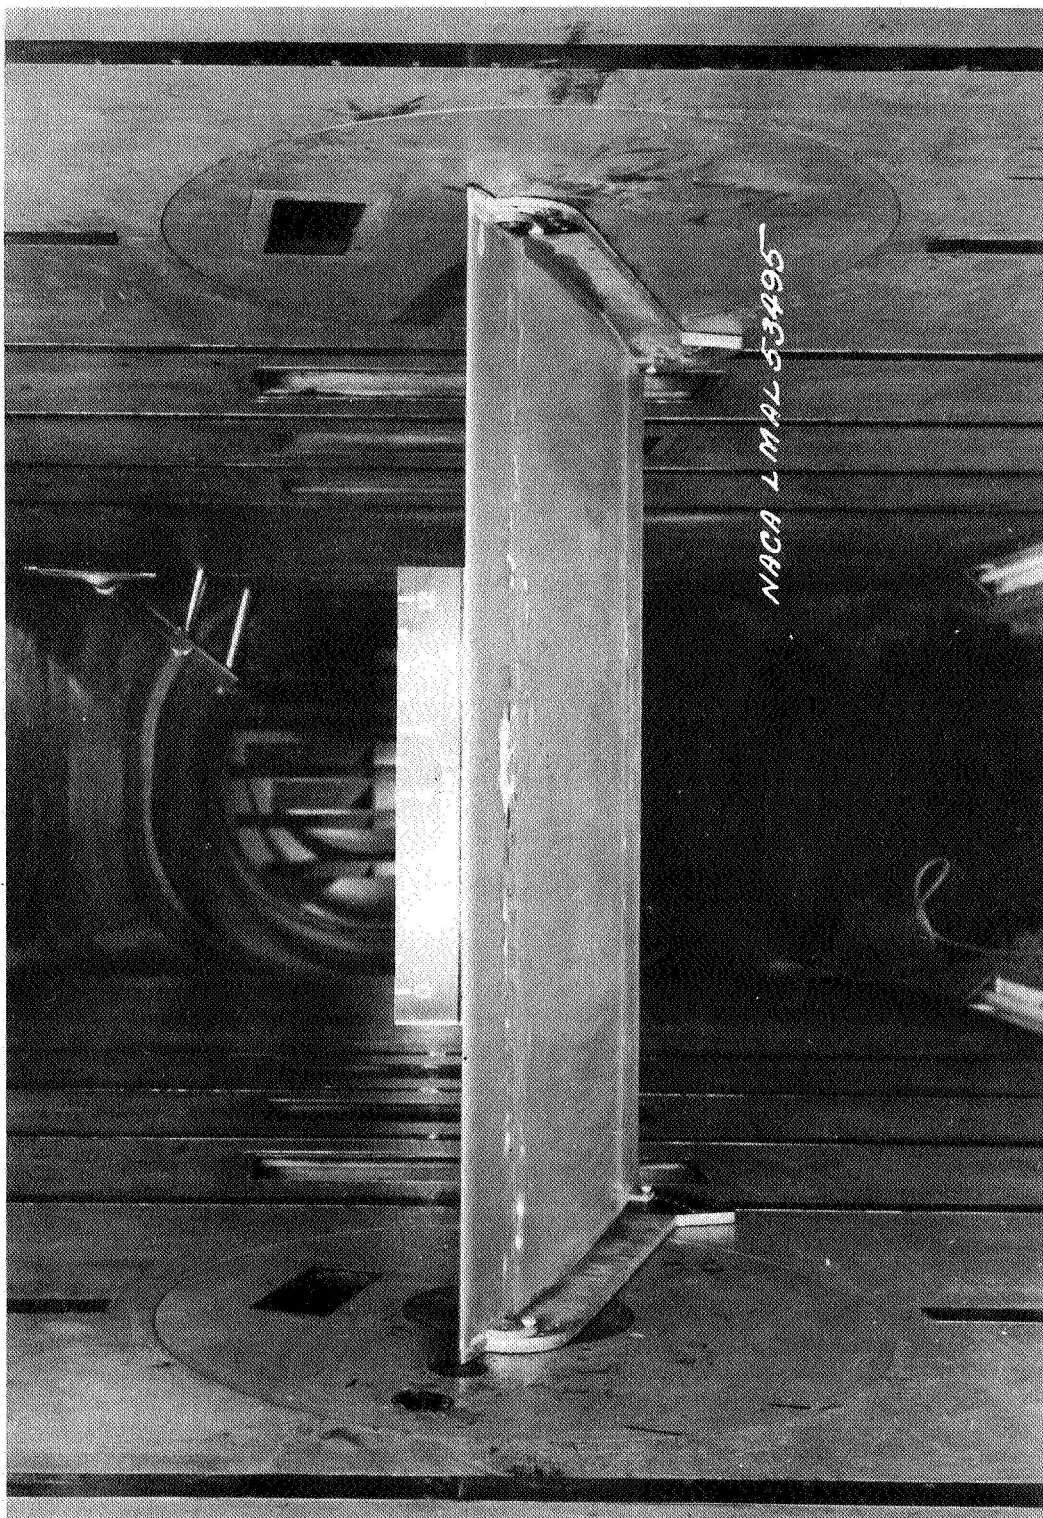
(a) Front bottom view.

Figure 1.- NACA 65A006 airfoil with 0.15-chord drooped-nose and 0.20-chord plain
trailing-edge flaps neutral.
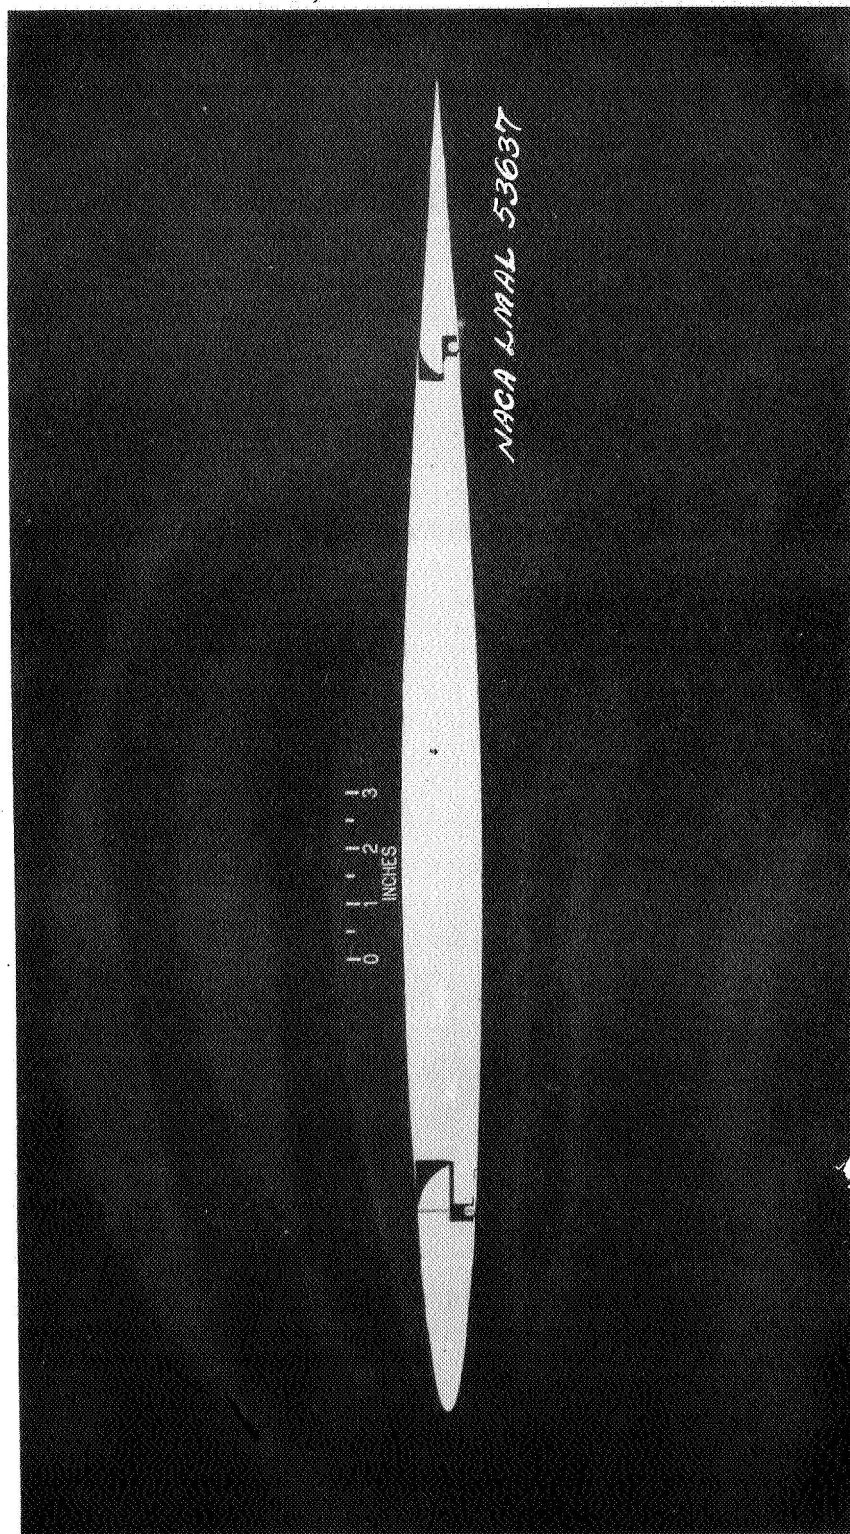
(b) Profile view.

Figure 1.- Concluded.

NACA LMAL 53639
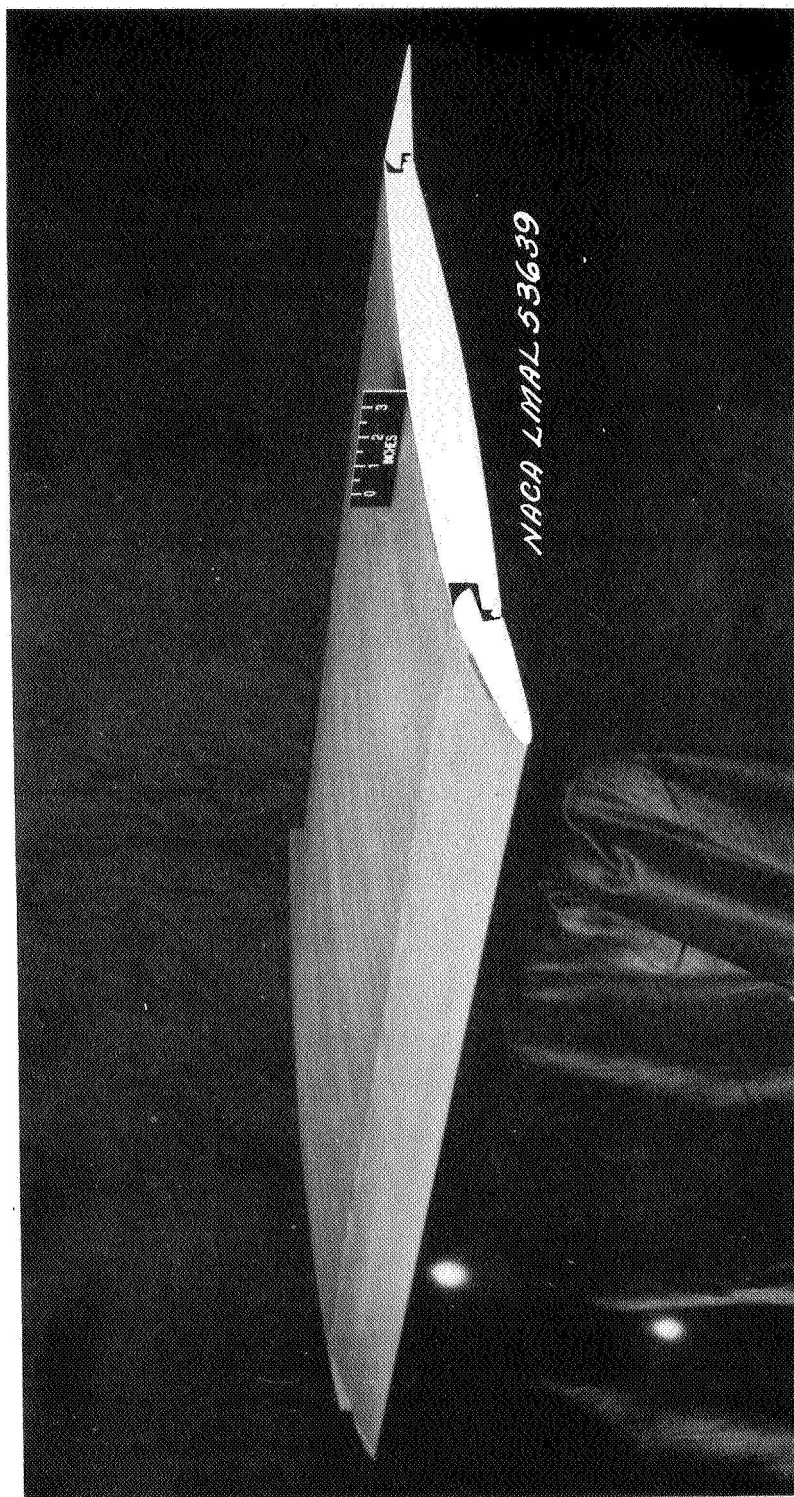
(a)   Three-quarter front view of upper surface; $\delta_N = \delta_F = 10^O$.

Figure 2.- NACA 65A006 airfoil with 0.15-chord drooped-nose and 0.20-chord plain
            trailing-edge flaps deflected.
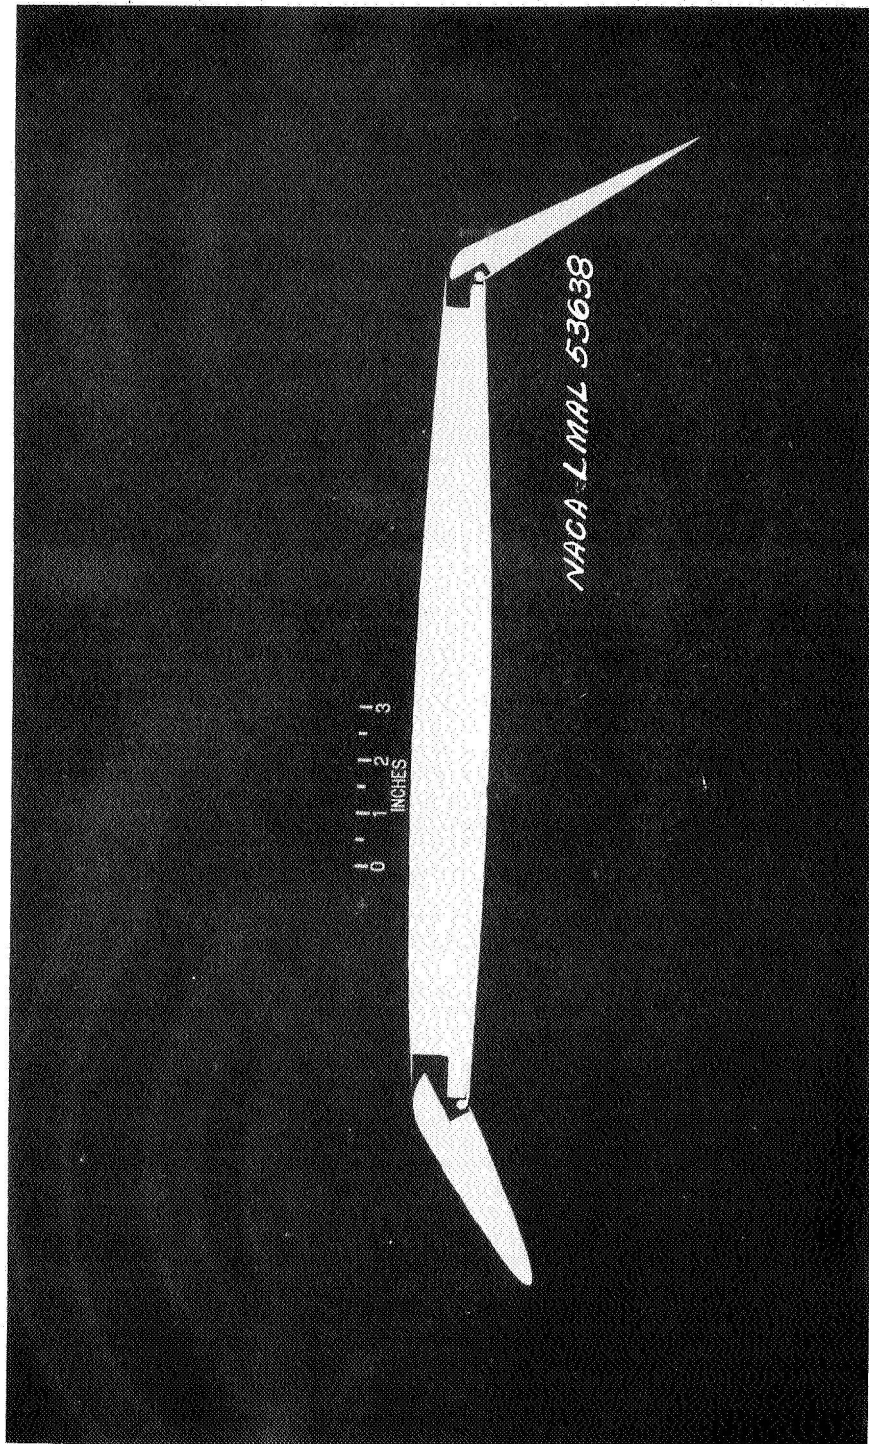
(b) Profile view. $\delta_N = 28^o$; $\delta_F = 59^o$.

Figure 2.- Concluded.
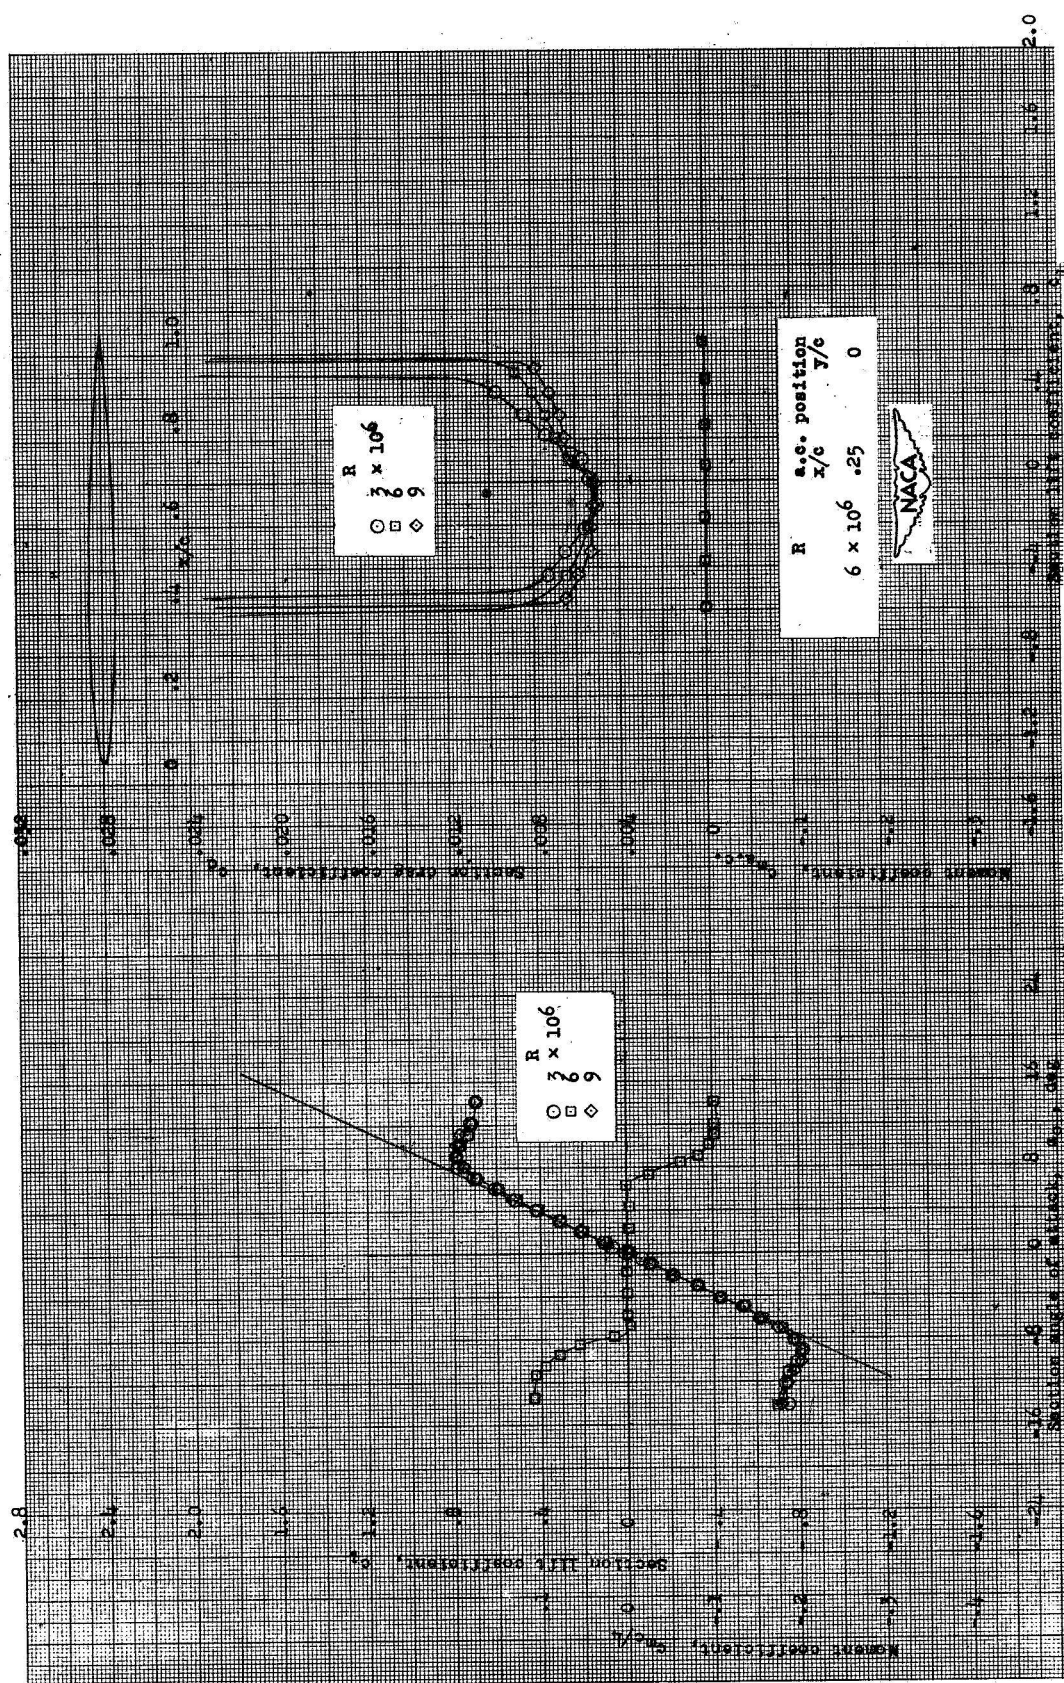
Figure 3 .- Aerodynamic characteristics of an NACA 65A006 airfoil.
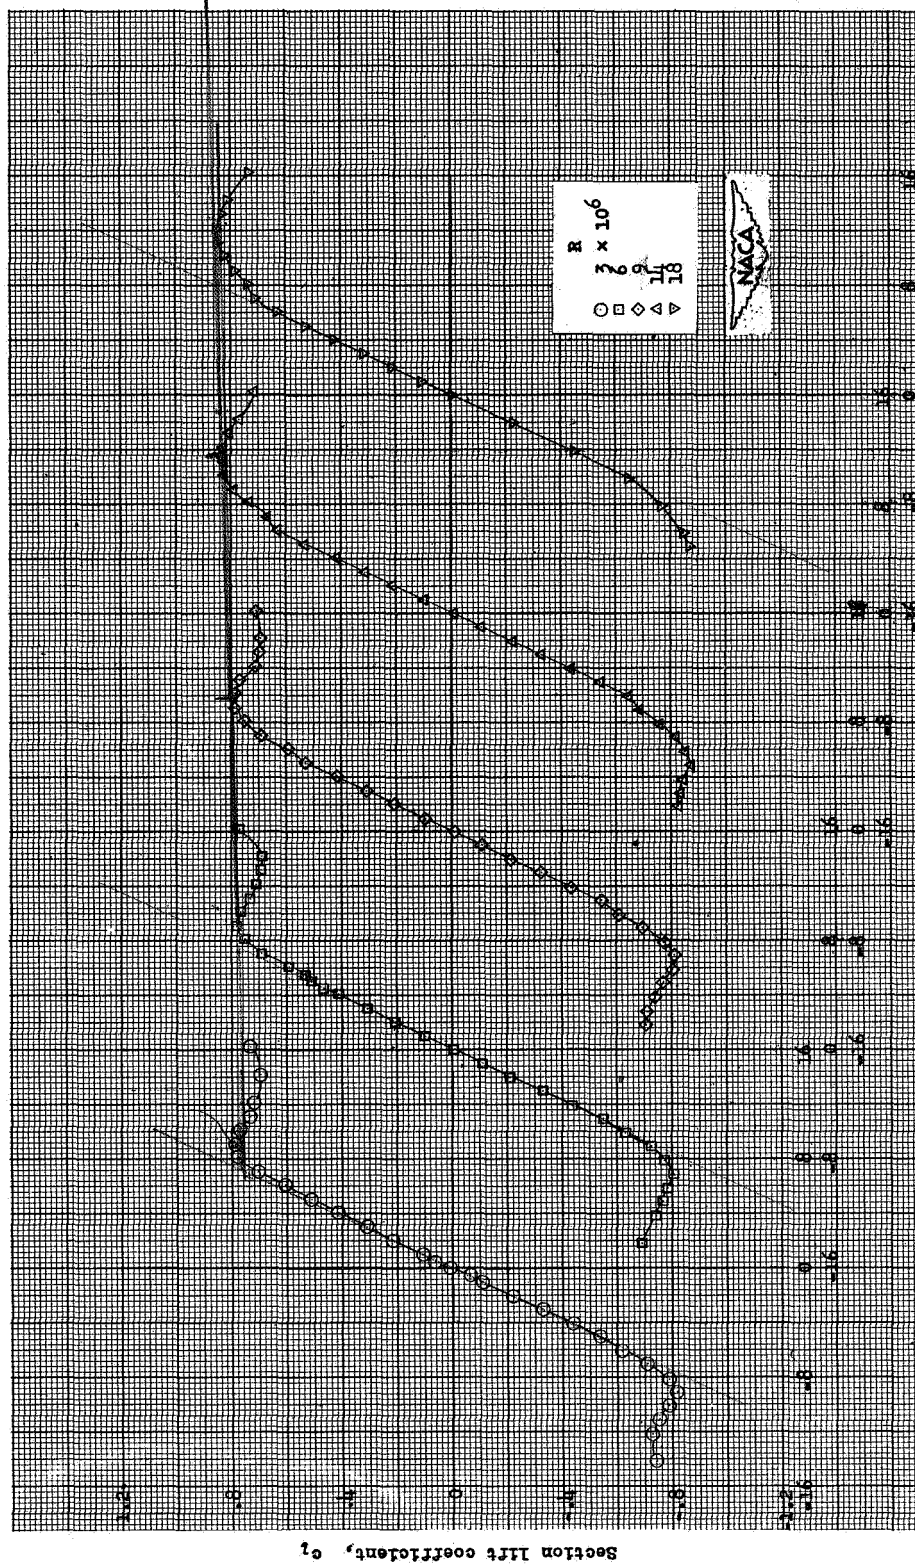
Figure 4.— Effect of increased Reynolds number on the section lift characteristics of an NACA 65A006 airfoil with the drooped-nose and plain flaps neutral.
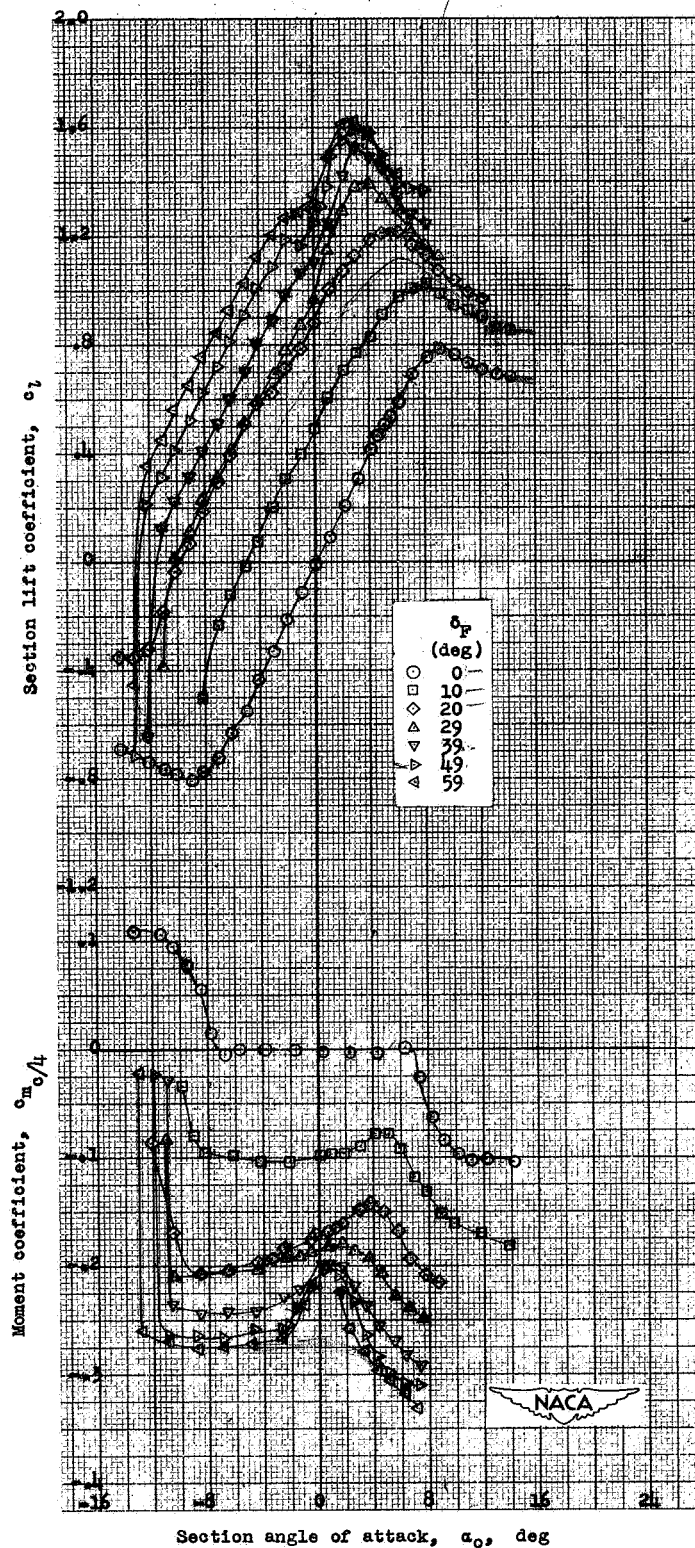
Figure 5.- Section lift and pitching-moment characteristics of an
NACA 65A006 airfoil for various deflections of the 0.20-chord
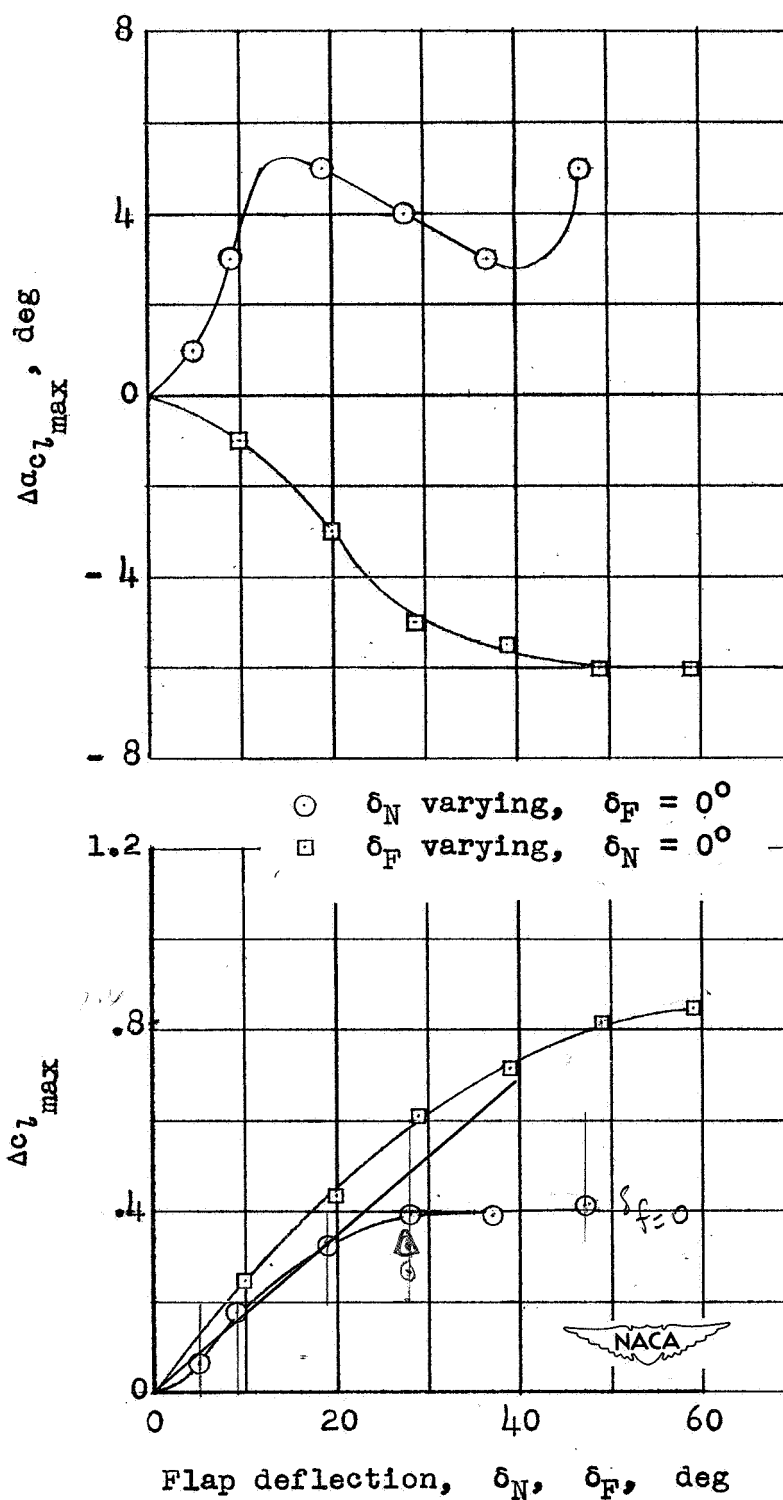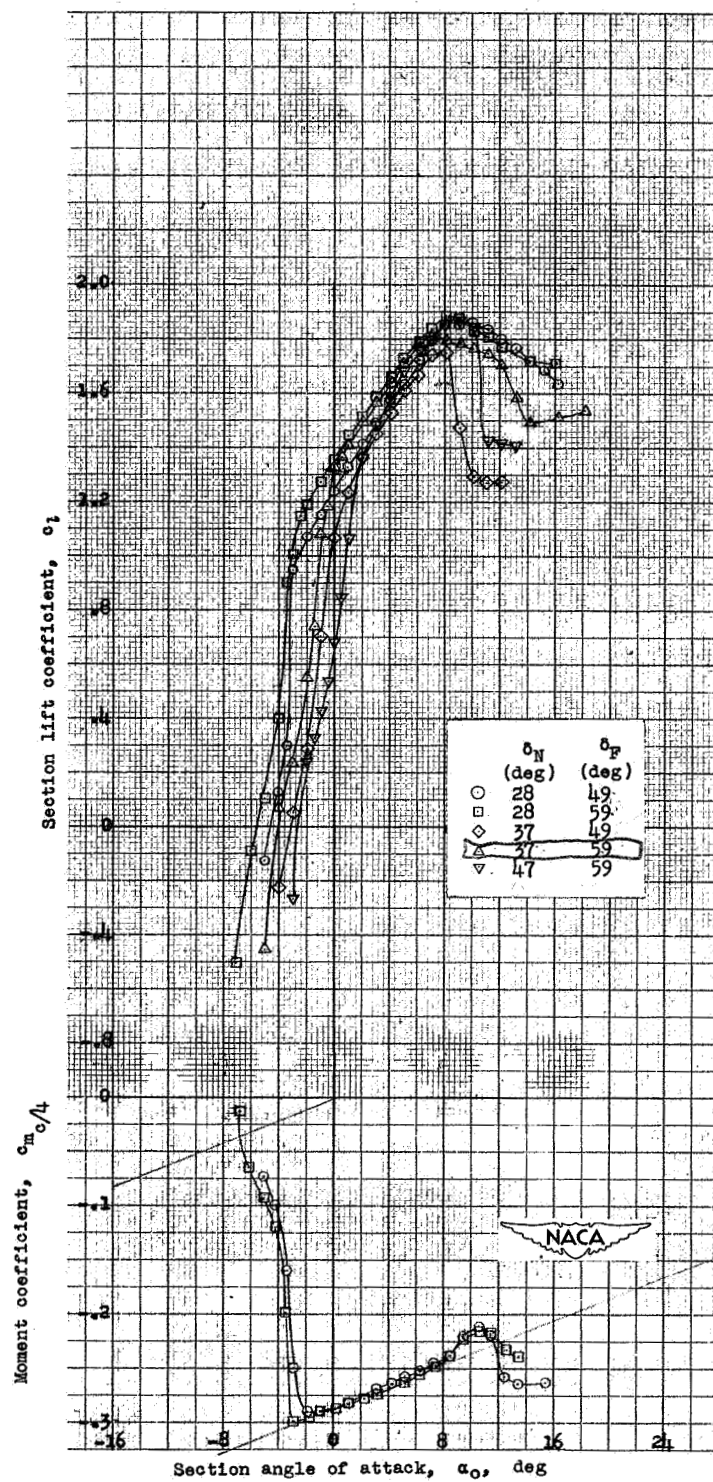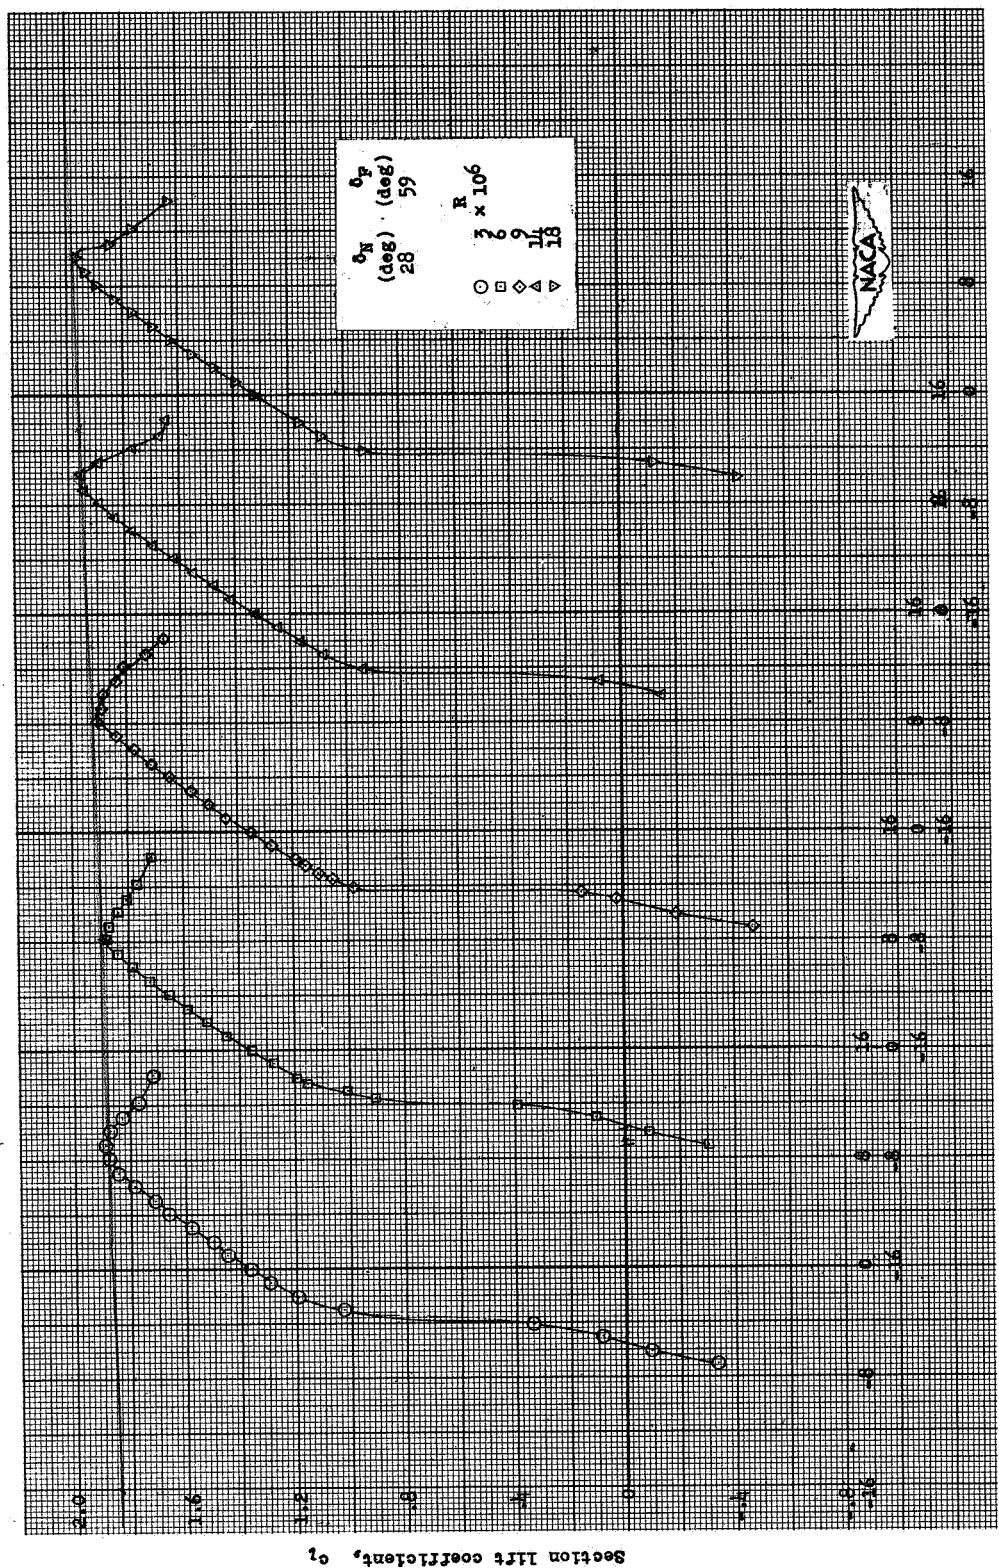plain flap; δ_N, $0°$; R, 6×10^6.
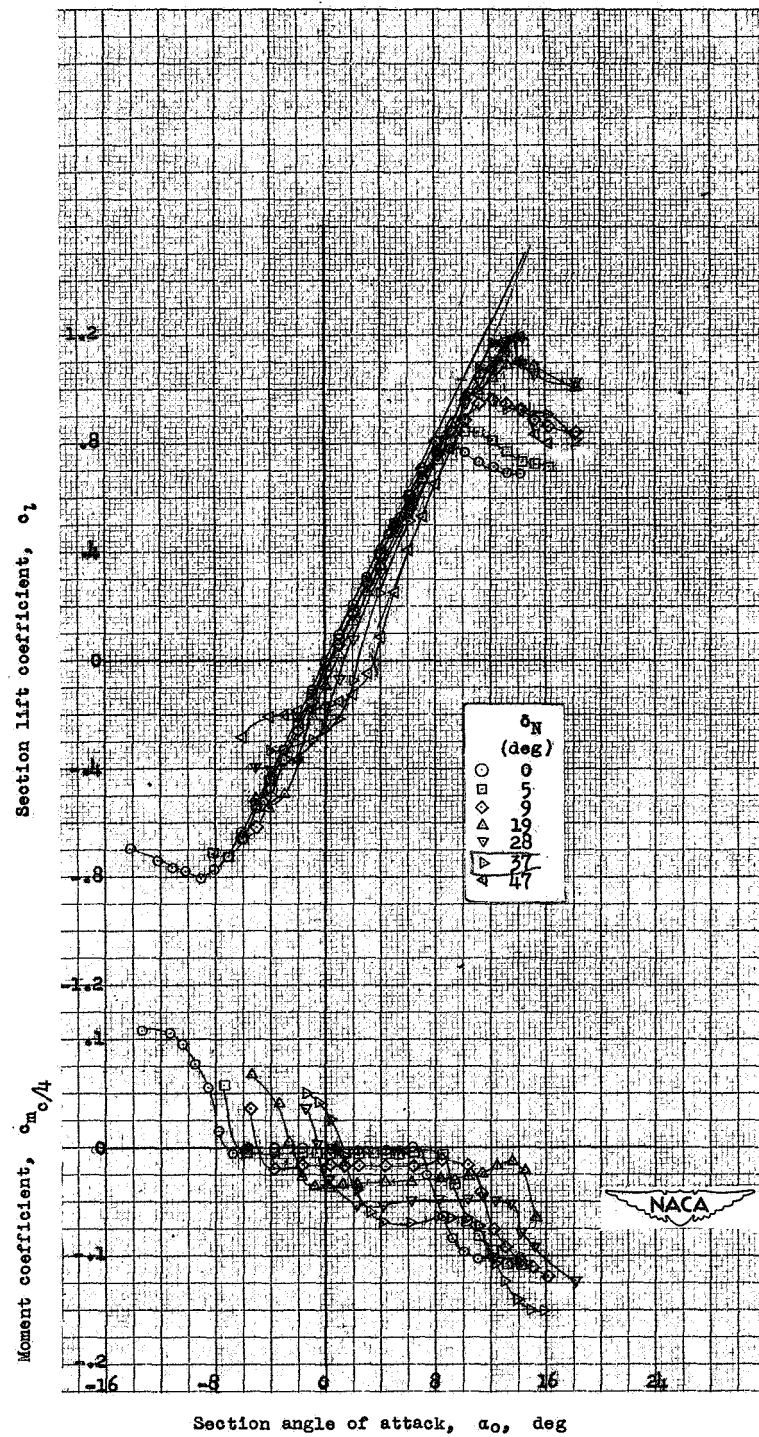
Figure 6 .- Section lift and pitching-moment characteristics of an
NACA 65A006 airfoil for various deflections of the 0.15-chord
drooped-nose flap; δ_F, 0^o; R, 6 x 10^6.

Figure 7 .- Variation of the increment in maximum section
   lift coefficient and angle of stall with deflection of
   the drooped-nose and plain flaps on an NACA 65A006 airfoil;
   R. 6 × 10⁶.

Figure 8 .- Section lift and pitching-moment characteristics of an NACA 65A006 airfoil for various deflections of the drooped-nose and plain flaps; R, 6 × 10⁶.

Figure 9 .- Effect of increased Reynolds number on the section lift characteristics of an NACA 65A006 airfoil with the drooped-nose and plain flaps deflected simultaneously.
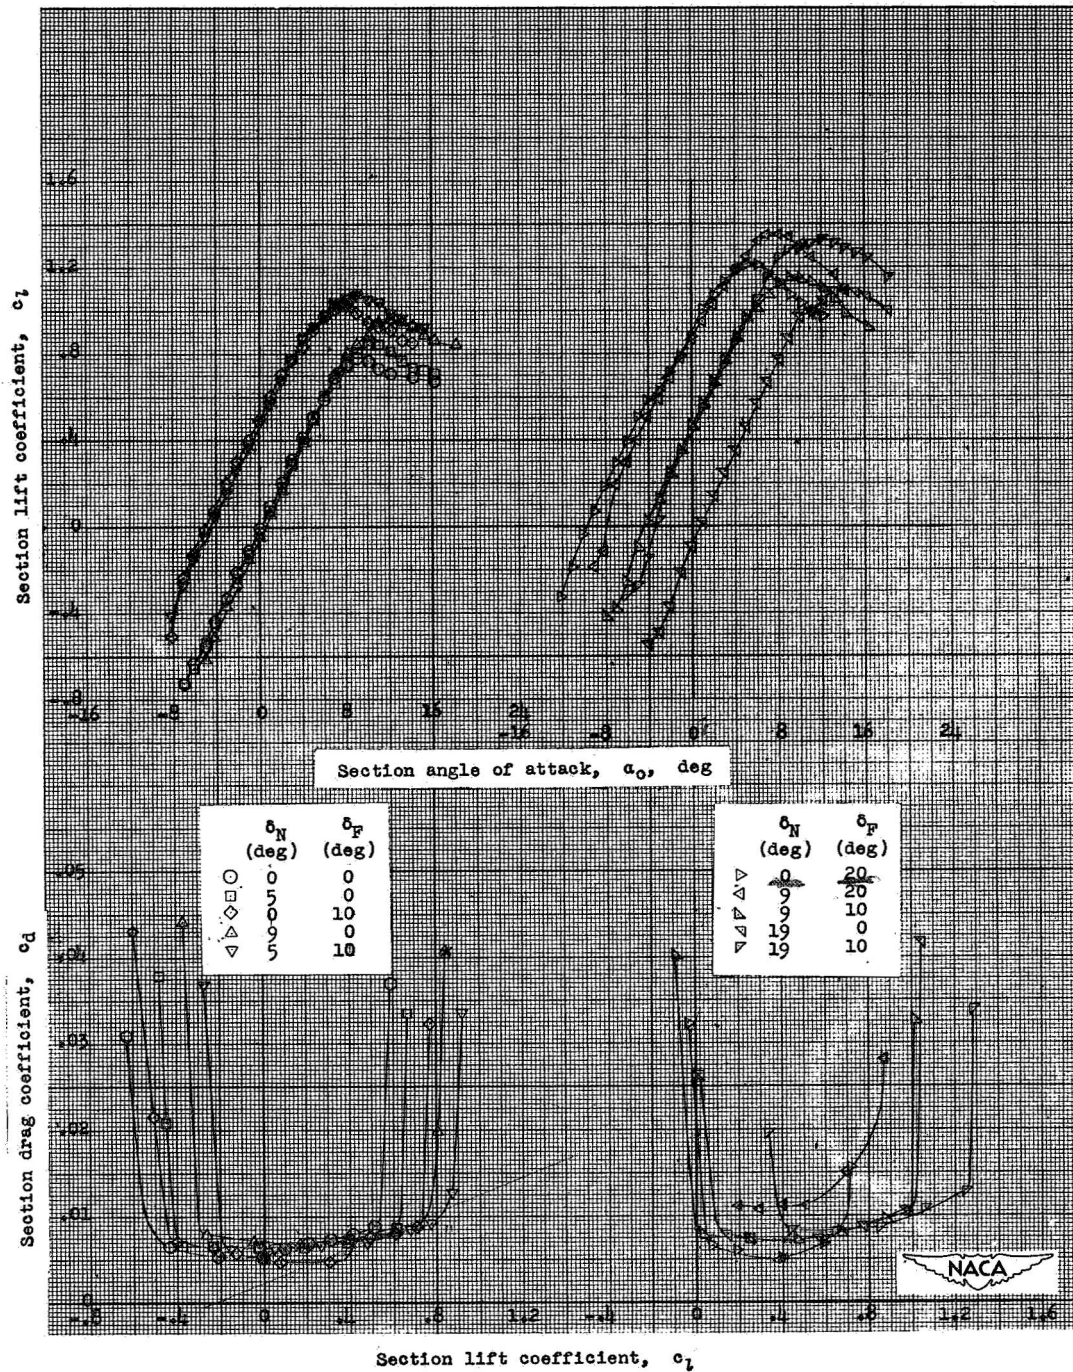
Figure *10.-* Section lift and drag characteristics of an NACA 65A006 airfoil
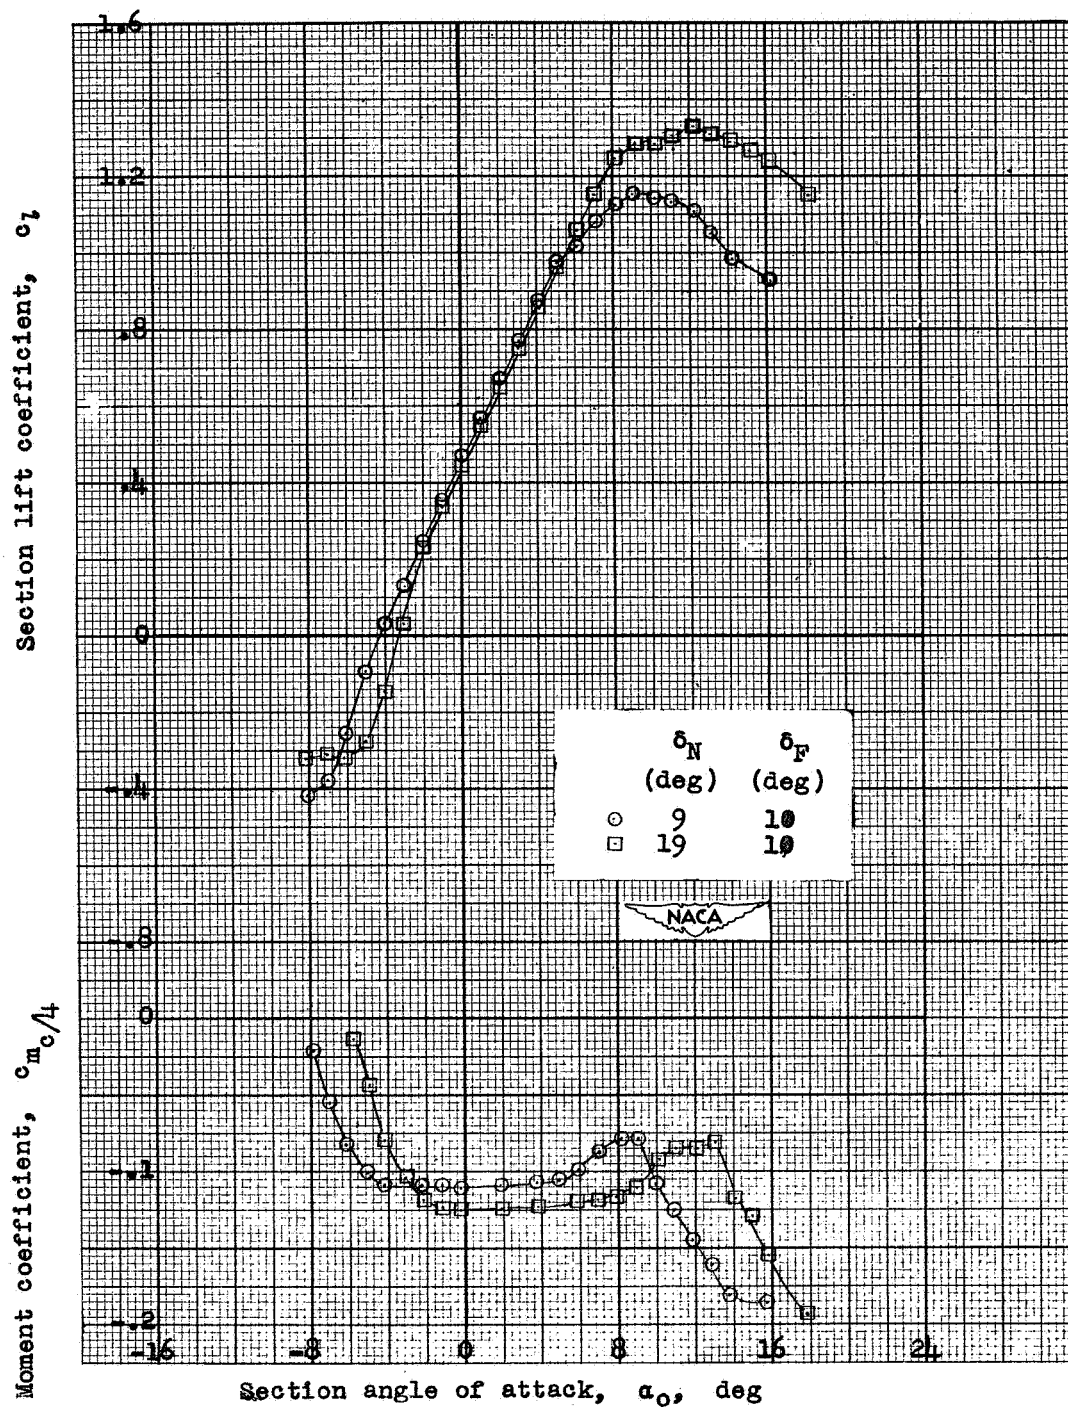for various deflections of the drooped-nose and plain flaps; R, 6 × 10⁶.

Figure 11.- Section lift and pitching-moment characteristics of an
NACA 65A006 airfoil for various deflections of the drooped-nose
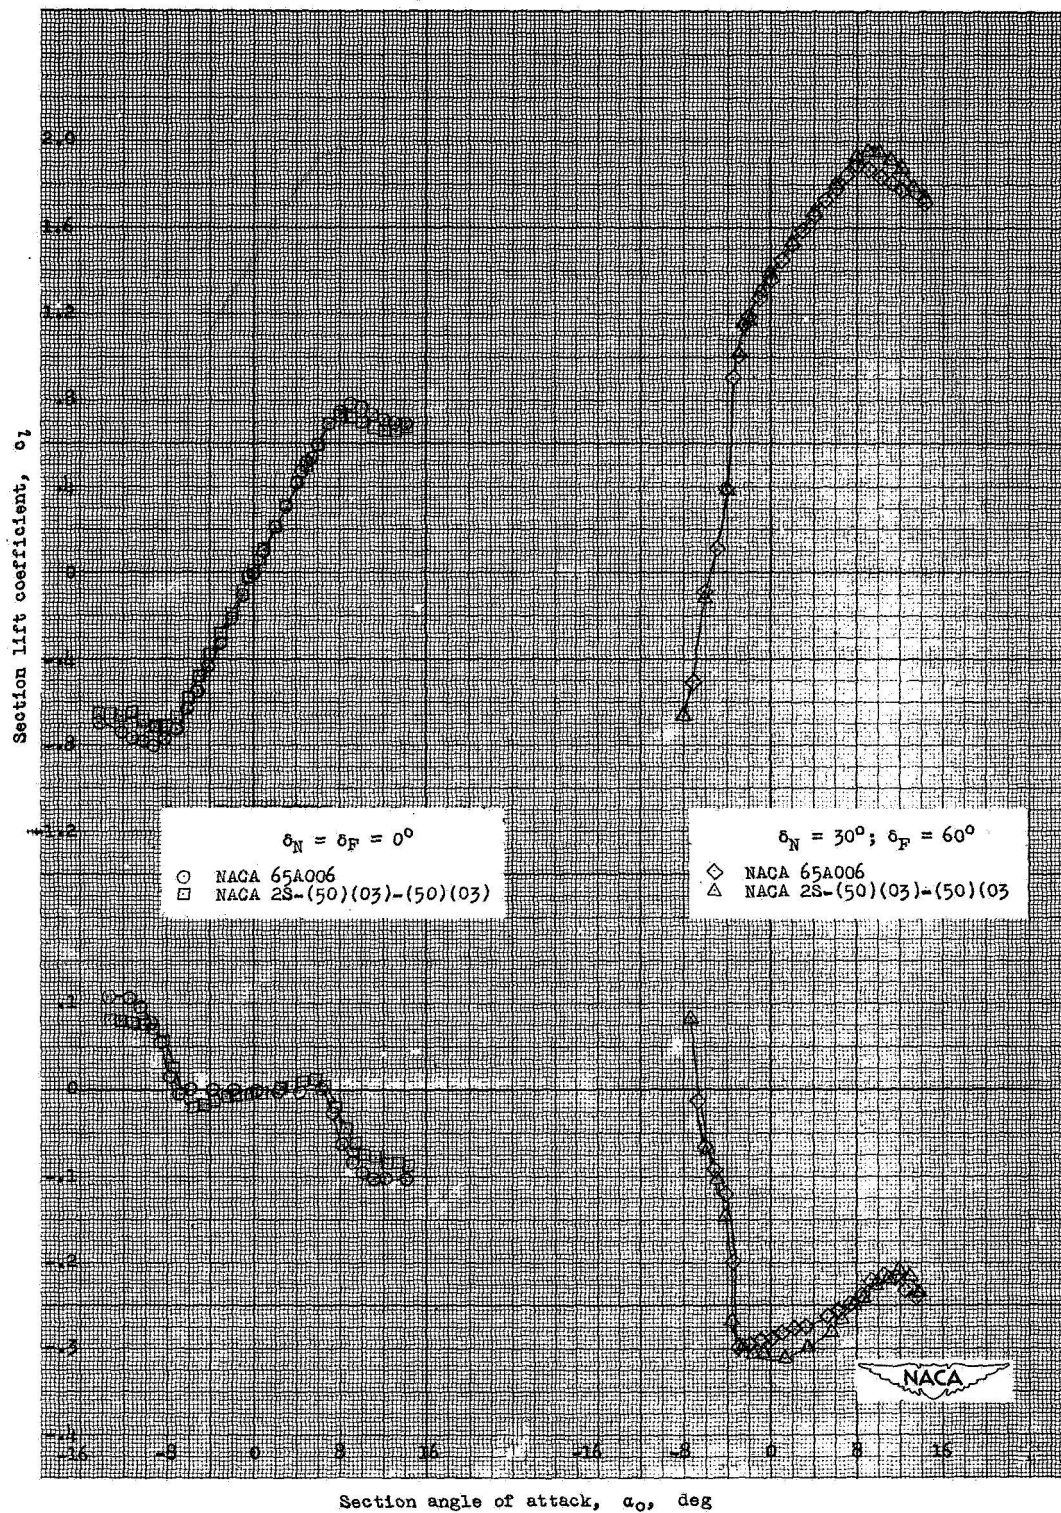and plain flaps; R, 6 × 10⁶.

Figure 12.- Comparative lift and pitching-moment characteristics of an NACA 65A006 and an NACA 2S-(50)(03)-(50)(03) airfoil equipped with similar high-lift devices. R, 6 × 10⁶.